

STR1 & STR2 Tank Adapter

What's in the box?



✓ 1× STR Adapter

✓ 1× Sealant

✓ 5× M10 Bolts



**STR1
Manual**
simarine.net




**STR2
Manual**
simarine.net



Support
support@simarine.net

STEP BY STEP

Mounting the adapter

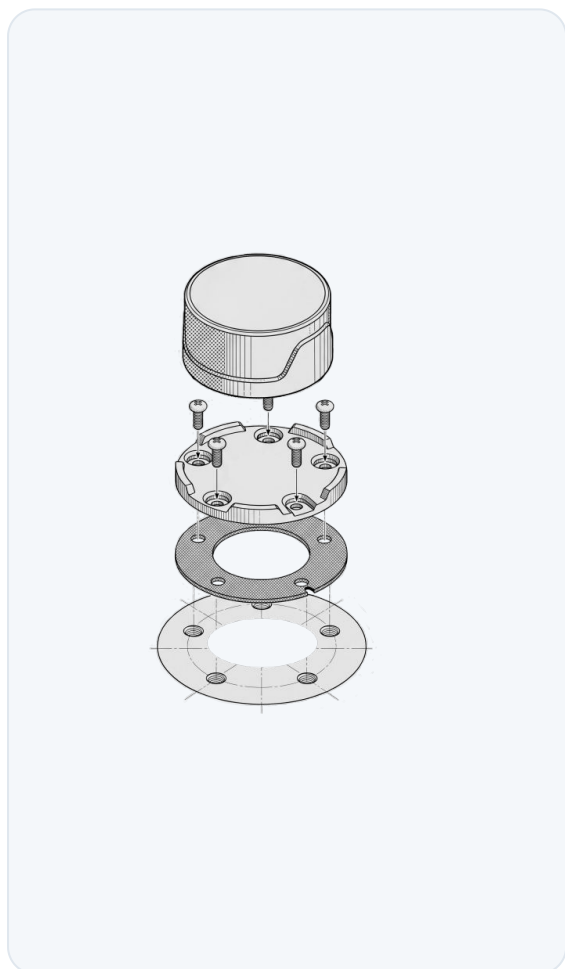

1

Clean & dry

Thoroughly clean and dry the tank surface where the adapter will be mounted to ensure a proper seal.

2

Position the seal

Place the rubber seal over the tank opening.

3

Align the indent

Rotate the rubber seal until the indent **(A)** on its outer edge is perfectly aligned with the recessed mounting point **(B)** on the plastic adapter.

4

Place the adapter

Set the plastic adapter on top of the seal. Verify all 5 mounting holes are aligned across the adapter, the seal and the tank surface.

5

Secure with screws

Insert the 5 supplied screws. Tighten in a cross-pattern for even pressure, but do not overtighten — this can deform the seal.

6

Prep the sender

Remove the protective film from the adhesive tape on the bottom of the STR1/STR2 sender unit.

7

Final mount

Carefully center the sender on the adapter and press down firmly to secure the adhesive bond.



Important: This adapter is not meant to be used with tanks containing drinking water.